



I-CON X Series

Difference is no longer a problem

I-CON X.1D

I-CON X.1D is a new product innovations of I-CON X.1 in data communication with additional display and buttons. Which allows indicators to connect with various types of devices such as external displays, printers, etc. This product is formed of a converter that is packaged in a compact manner, with a simple, and solid design. Another advantage of I-CON X.1D innovation is about the print out results, it can be a statistical data. I-CON X.1D is a practical and economical solution that is certainly supported by excellent quality and capability.

Connect with various devices

Package in compact, simple, and solid design

Reliable data processing capability

Can replace any kind of existing indicator to own indicator without worry about existing locked protocol

Practical & economical solution

Solution for difference protocol, without change existing installed software



Statistical data for print out results



```

<Data Statistic>-----
NO.1: 0.00011 Kg
NO.2: 0.19150 Kg
NO.3: 0.19147 Kg
NO.4: 0.19151 Kg
NO.5: 0.12210 Kg
NO.6: 0.22030 Kg
NO.7: 0.34683 Kg
NO.8: 0.23461 Kg
NO.9: 2.58810 Kg
NO.10: 0.00000 Kg
NO.11: 0.00000 Kg
<RESULT>-----
N: 11
T: 4.08653 Kg
Mean: 0.37150 Kg
SD: 0.70896 Kg
MAX: 2.58810 Kg
MIN: 0.00000 Kg
RNG: 2.58810 Kg

```

I-CON X.1D is part of the I-CON X series. With this I-CON X.1D series, the scale company or the end user can replace any kind of existing indicator to their own indicator without worry about the existing locked protocol. Another function of I-CON X.1D is statistical data output.

This I-CON X series is the solution for the company which need to replace their indicator to the new model indicator without change their existing installed software.

Physical Specification

- Box color : Orange
- Material : Plastic
- Dimension (mm) : 110 (L) x 70 (W) x 38 (H)
- Weight (g) : 126

Main Feature

- Converter for indicators uses RS-232 serial communication with DB9
- Statistical data result print out

Function

- Data communication between indicators with various types of devices

Applications & Features

- Indicator (CAS, Dini Argeo, Avery, Mettler Toledo, Kubota, Sartorius, Vibra, AND, etc)
- External Display
- Printer (All type printer)
- Software External (PC/Laptop)
- Etc


Advantage

- Economical prices with competitive quality
- Easy installation
- Easy to use
- Ensure no data communication failure


Specifications

Model	I-CON X.1
Input voltage	± 5 VDC
Working temperature	5° C - 50° C

Dimensions

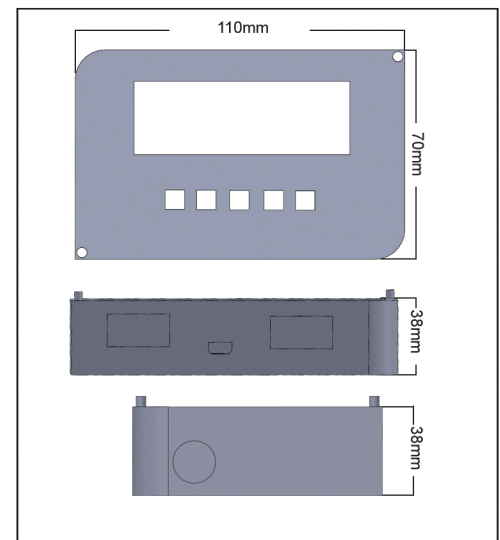

How I-CON X.1D Work?

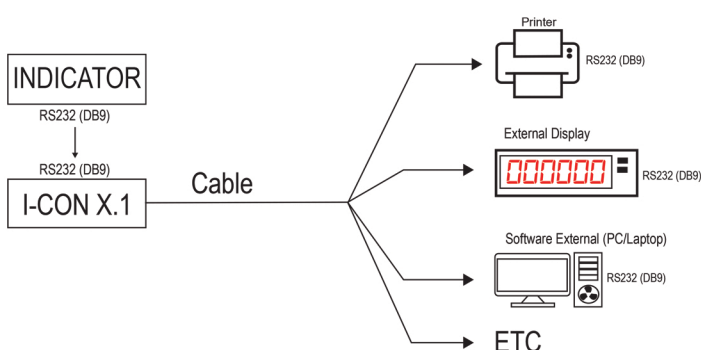

Address:
Green Sedayu Bizpark
Jl. Daan Mogot KM. 18 Blok DM 11 No. 62
Kalideres, Jakarta Barat 11840
www.interscales.com

